



Continuous columns

FOR BUILDING SKELETONS

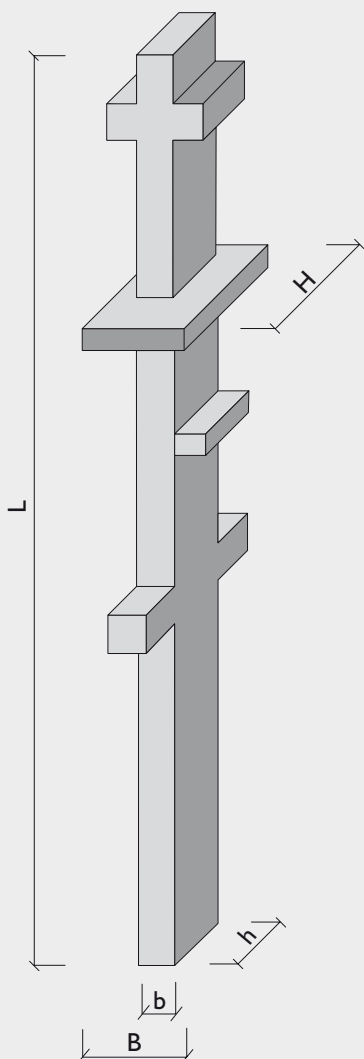

FOR HALLS

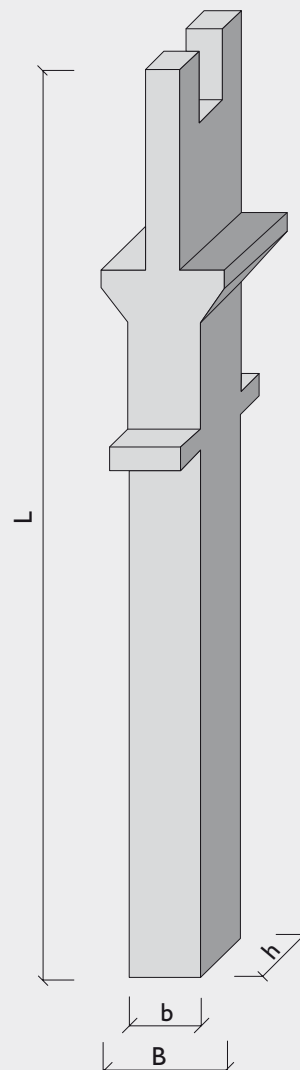

SELECTED PARAMETERS

Dimensions

L max = 24,500 mm
B max = 1,750 mm
b min = 250 mm
H max = 1,000 mm
h min = 250 mm

Concrete

C 30/37-C 45/55

Max. weight

27 tons

Surface finish

smooth

Edge chamfering

10/10 mm

Anchoring elements

on agreement with the manufacturer;
the column foot may also be roughened

Shape and dimensional design

in accordance with the required functional characteristics and on the basis of static verification with the manufacturer's approval

Assembly brackets

on agreement with the manufacturer

VCES a.s., PREFA Division

VSD Pohřebáčka, 533 45 Opatovice nad Labem,
phone: +420 466 944 013, fax: +420 466 941 205, e-mail: prefa@vces.cz



A BOUYGUES CONSTRUCTION COMPANY